ANSI standard Heavy Duty Electric Strike

Model:NJ-390A Series


Specification


Feature	Fail Safe/Fail Secure(Adjustable)
Face Plate	140Lx40Wx44H
Holding Force	1000lbs
Magnetic Valve	500000 times
Voltage	12VDC(Need Order 24VDC)
Current	12V/250mA
Suitable Temperature	–10~+50℃(14–131F)
Operating Humidity	0~90%(non–condensing)
Weight	0.6kg

Standard Features

1. Fail safe or fail secure reversible
2. Left-way opening or right-way opening installation adjustable
3. Stainless steel bolt,304 stainless steel faceplate
4. Max static pressure holding force is 1000 lbs
5. Magnetic valve duration>500000 times

Diagram(unit:mm)

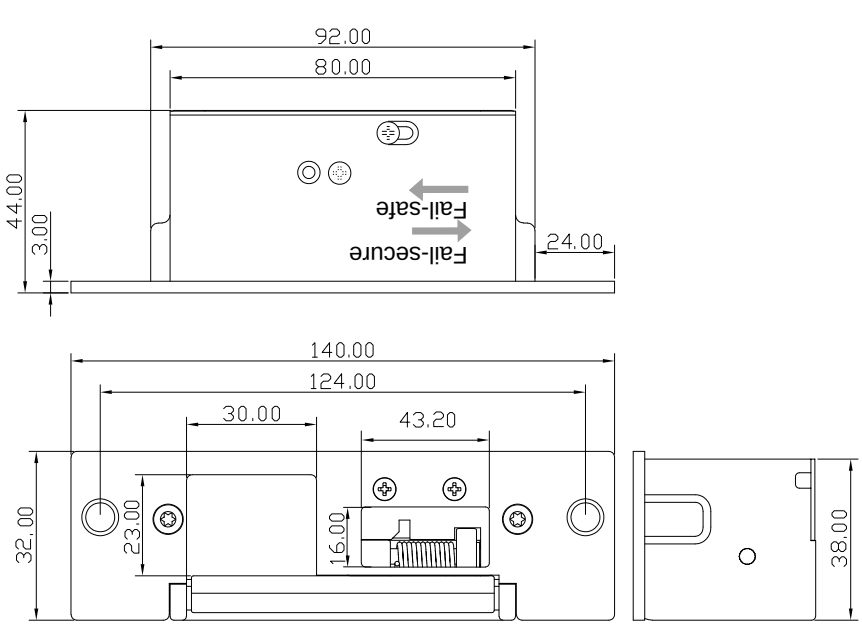


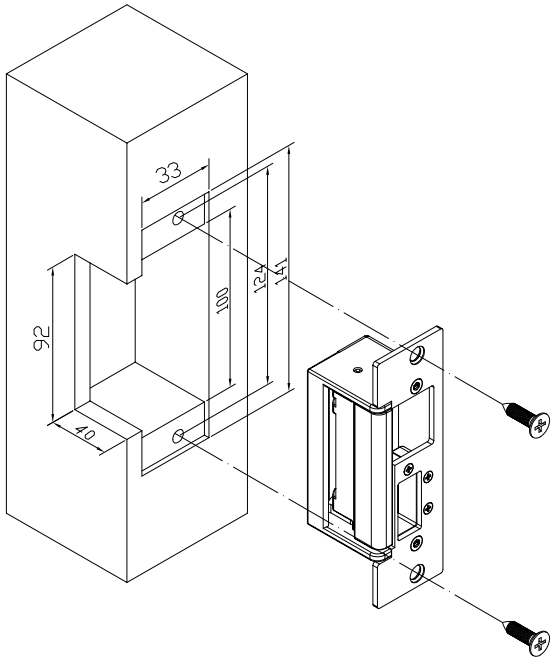

NJ-390A


Function Conversion

You can set the operation mode of Fail Safe or Fail Secure.
Loose the screw and tighten it in the other hole.
Fail Safe(NC): When power off, the door is in the open status.
Fail Secure(NO): When power off, the door is in the closed status.

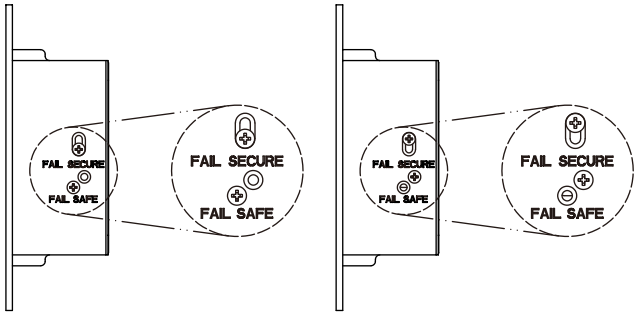


Fail Safe　　Fail Secure

Adjustable installation

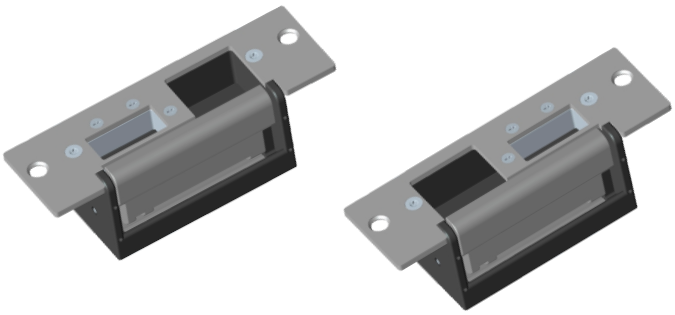

Left-way open　　Right-way open

Installation Diagram

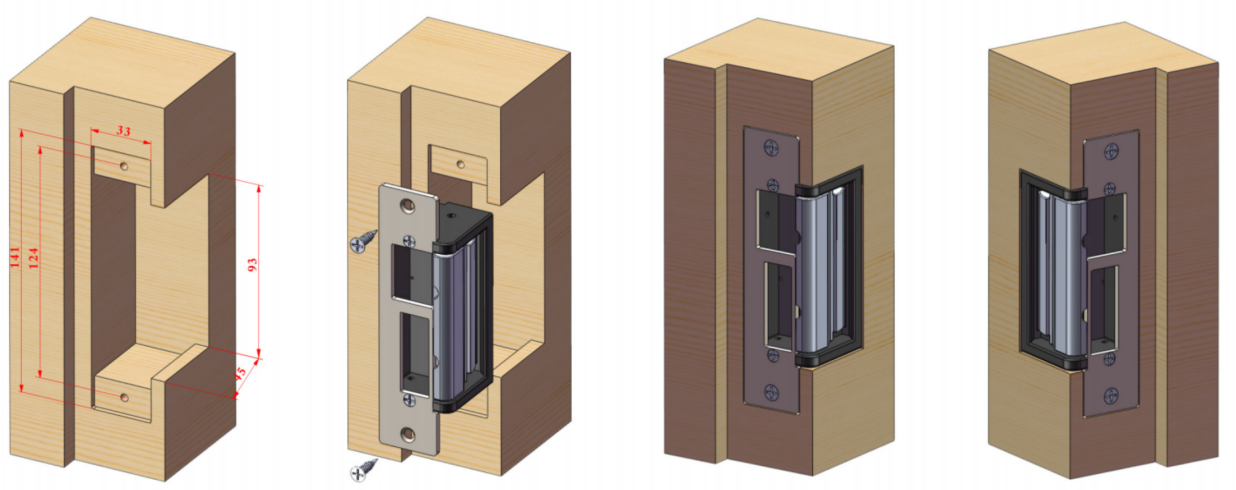

Wiring Diagram

